wumm
Engineered For Strength




SS 304 TELESCOPIC DRAWER SLIDE – 35 Kg SOFT CLOSE


- Precision-engineered ball-bearing system
- Complete drawer extension for easy access
- Quick and convenient front installation
- Easy drawer removal with latch mechanism
- System 32 compatible installation
- Maximum load-bearing capacity: 35 kg
- Constructed from premium-grade SS 304 stainless steel
- Integrated soft-closing mechanism
- Lifetime material warranty with a 5-year functional warranty
- BIS-certified quality and safety

Code	Finish	Size(mm)
05012	SS	300
05013	SS	350
05014	SS	400
05015	SS	450
05016	SS	500
05017	SS	550

Fitting Instructions

- Ensure a clearance of 12.7–13 mm on both sides between the cabinet and drawer.
- Press the release latch to detach the inner slide.
- Position the outer slide inside the cabinet and secure it using the screw holes accessible through the intermediate slide slots.
- Make sure both slides are properly aligned and parallel, then firmly tighten all screws.
- Attach the inner slide to the exterior sides of the drawer.
- Insert the drawer into the intermediate slides and push gently until the locking latch automatically clicks into place.

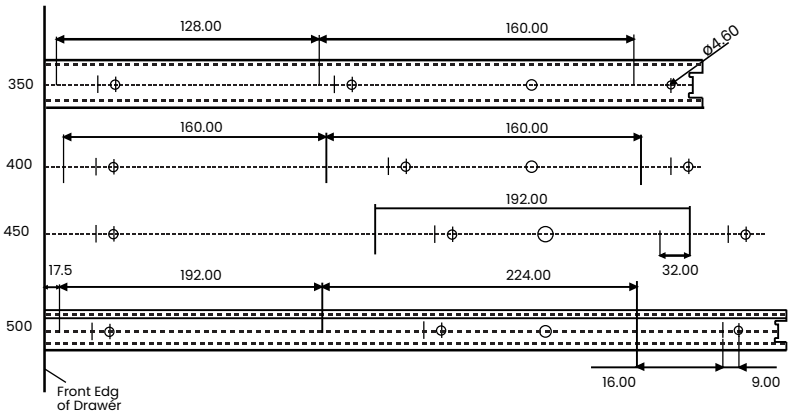

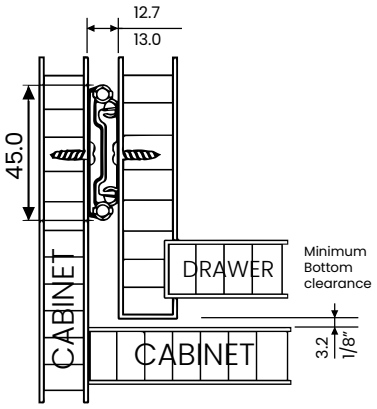

DRILLING DIAGRAM FOR CABINET

